

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

**0 392 571
A2**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: **90111052.8**

(51) Int. Cl.⁵: **B29C 45/16, B29C 49/22**

(22) Date of filing: **11.02.85**

This application was filed on 12 - 06 - 1990 as a divisional application to the application mentioned under INID code 60.

(30) Priority: **17.02.84 US 581409**

(43) Date of publication of application:
17.10.90 Bulletin 90/42

(60) Publication number of the earlier application in accordance with Art.76 EPC: **0 153 120**

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL SE

(71) Applicant: **CONTINENTAL PET TECHNOLOGIES, INC.**
800 Connecticut Avenue
Norwalk Connecticut 06856(US)

(72) Inventor: **Krishankumar, Suppayan M.**
23 Old Coach Road
Nashua, New Hampshire 03050(US)
Inventor: **Nahill, Thomas E.**
43 Budron Avenue
Salem, New Hampshire 03079(US)

(74) Representative: **Hallam, Arnold Vincent**
E.N. LEWIS & TAYLOR 144 New Walk
Leicester LE1 7JA(GB)

(54) **Laminated preform with internal barrier layer.**

(57) This relates to laminated preforms, the method of forming such preforms and products which may be beneficially formed utilizing such preforms. Most particularly, this relates to a preform which has formed as part of the injection molding thereof two layers of barrier material which are disposed within two layers of thermoplastic resin and having received therebetween a solid core of thermoplastic resin. The specific method of forming the preform permits the barrier material layers to be of a greatly reduced thickness as compared to such layer thicknesses permissible in the past, with the result that the barrier material layers in the blow molded articles are of a thickness recognized to be acceptable for the barrier function. The barrier material layers may be selectively terminated along the length of the preform so as to permit portions of the resultant blow molded article to be removed and reused.

EP 0 392 571 A2

Laminated preform with internal barrier layer

This invention relates in general to new and useful improvements in preforms formed by injection molding thermoplastic materials and which preforms are utilized in the forming of blow molded articles.

This invention particularly relates to the forming of a preform of a thermoplastic material having incorporated therein a layer of barrier material.

Currently multi-layer containers are produced commercially utilizing the following methods of processing:

- a. Coextrusion blow molding
- b. Coextrusion stretch blow molding
- c. Tube coextrusion and reheat stretch blow molding
- d. Sequential injection molding of preforms in multi-station injection molds and stretch blow molding.

Among the methods listed above, method "d" is the only one which yields finished cold multi-layer preforms. But this method is still not practical for producing multi-layer preforms with one of the layers having a thickness of .003 to .015 inch.

There has been developed a method of forming a preform by injection molding wherein there is incorporated therein a central layer of barrier material. This is disclosed in U.K. patent application No. 2091629A. However, because of the cost of the barrier material, the thickness of the barrier layer which is possible in accordance with that patent application is too great to be commercially feasible.

Barrier materials which are suitable for use in the forming of containers have 2 to 3 magnitudes higher gas barrier and are 4 to 8 times more expensive when compared to thermoplastic materials suitable for use in the forming of containers. The thickness of the barrier layer required in a container wall for the majority of the packaging applications is on the order of .0005 to .0015 inch. This would, assuming a 10 times all thickness reduction during the biaxial orientation of blow molding a preform, translates to a .005 to .015 inch layer thickness of the barrier material in the wall of a multi layer preform.

US-A-3,976,226 discloses an apparatus for the manufacture by injection molding of articles composed of a plurality of layers of at least three distinct materials coated one over the other, in which there is injected a measured quantity of a first material adapted to form the skin of the article, a measured quantity of a second material to form the intermediate layer, and a measured quantity of a third material to form the body of the article. The materials are introduced into the mold coaxially so

as to give a uniform distribution. The injection molding apparatus includes an injection nozzle having a single discharge channel opening on the side of the mold and at least three coaxial chambers each connected to a separate supply circuit for each material to be injected.

Accordingly, the present invention provides a method of forming a blow molded hollow member having a laminated wall including at least one thin intermediate layer which is free of a heat bond with adjacent layers, said method comprising the steps of forming an injection molded laminated wall preform and blow molding the preform into a hollow member while reducing the thickness of the layers characterised in that said at least one intermediate layer is tightly compressed between said adjacent layers to form a diffusion bond with said adjacent layers, and, during the blow molding of the preform, biaxially stretching the layers with the thickness of said intermediate layer being reduced to a substantially incompressible thickness.

The present invention also provides apparatus for forming a laminated preform having inner and outer first layers, inner and outer second layers within said first layers, and an innermost third layer, said apparatus comprising a preform forming injection mold unit including a mold element and a cooperating core defining a mold cavity; and a supply means for supplying thermoplastic resin under pressure and a separate supply means for supplying barrier material under pressure; characterised in that there is provided a valve coupling said supply means and said mold unit; and means for actuating said valve in sequence for admitting first a preselected quantity of said thermoplastic resin to said mold cavity, then a preselected quantity of said barrier material to said mold cavity, and finally more of said thermoplastic resin to said mold cavity.

The present invention further provides a laminated preform for forming blow molded articles and the like wherein said preform has a tubular wall having inner and outer surfaces and said tubular wall in radial cross section comprises inner and outer first layers of a thermoplastic resin, characterised in that said tubular wall in radial cross-section further comprises inner and outer layers of a barrier material next to and between said inner and outer first layers, and a second layer of thermoplastic resin between said barrier material layers.

In accordance with this invention, one takes advantage of mold filling phenomenon which comprises:

1. Laminar flow
2. The development of elongational and

shear fields in the advancing melt front between two parallel cold walls

3. The formation of oriented solidified layers on the cold wall and the tunnel flow of molten material between the solidified layers.

A further feature of the preferred form of this invention is the ability to provide two very thin barrier layers instead of one thick layer and the advantages resulting therefrom.

The present invention is further described hereinafter, by way of example, with reference to the accompanying drawings, in which:

IN THE DRAWINGS:

Figure 1 is a schematic sectional view taken through one injection mold cavity, and shows the manner in which material is directed into the cavity to form a preform in accordance with this invention.

Figure 2 is an enlarged fragmentary schematic view showing the manner in which a first quantity of thermoplastic resin is injected into the bottom of the mold cavity and the resultant cooling upon contact with cold wall surfaces.

Figure 3 is a schematic sectional view similar to Figure 2, and shows the injection of a barrier material into the bottom of the mold cavity and the resultant tunnel flow of both the first quantity of thermoplastic resin and the barrier material.

Figure 4 is a schematic fragmentary sectional view similar to Figures 2 and 3, and shows the progressive flow of a second quantity of thermoplastic resin into and through the layers of the first thermoplastic resin and the barrier material.

Figure 5 is an enlarged fragmentary radial sectional view showing the flow of the thermoplastic material forming the first layers of the laminated preform.

Figure 6 is a diagram plotting the injection of the materials into the mold cavity against time.

Figure 7 is another diagram plotting pressure within the mold cavity against time.

Figure 8 is an enlarged radial sectional view through the neck finish end of a preform in accordance with this invention for forming a blow molded bottle, and shows one arrangement of material layers within the preform.

Figure 9 is a fragmentary sectional view similar to Figure 8, but showing another relationship of the material layers in the area of the neck finish.

Figure 10 is yet another enlarged fragmentary sectional view similar to Figure 8, and shows yet another arrangement of the material layers within the preform.

Figure 11 is an enlarged fragmentary sectional view similar to Figure 8, but through a slight-

ly different type of preform, and shows the arrangement of the layers therein.

Figure 12 is yet another enlarged fragmentary sectional view similar to Figure 8, but with respect to a preform of the type shown in Figure 11 and showing yet another arrangement of material layers.

Figure 13 is a vertical sectional view taken through an intermediate article of manufacture utilizing a preform such as that shown in Figures 11 and 12.

Figure 14 is a fragmentary enlarged radial sectional view taken generally along the line 14-14 of Figure 13, and shows the arrangement of the layers of material within the article.

Figure 15 is an enlarged fragmentary sectional view similar to Figure 14, and shows a different arrangement of the material layers.

Figure 16 is a vertical sectional view taken through a bottle or like container formed utilizing one of the preforms of Figures 8-10.

Figure 17 is an enlarged fragmentary radial sectional view taken generally along the line 17-17 of Figure 16, and shows the relationship of layers of material in the finished bottle.

Referring now to the drawings in detail, it will be seen that there is illustrated in Figure 1 a conventional injection mold generally identified by the numeral 20. It is to be understood that this is a schematic showing in that a conventional injection mold for forming a preform will include numerous cavities, for example sixteen or more, arranged in rows and columns. Such an injection mold is generally of a solid construction and each injection mold unit will include a mold cavity 22. Each mold unit 20 will also include a neck ring 24 which forms an extension of the mold cavity 22 and defines a neck finish. The neck ring 24 may be of a split construction. Further, each mold unit 20 is provided with a core 26.

It will be seen that the neck ring 24 in conjunction with the core 26 closes what may be considered to be the upper end of the mold cavity 22 while the lower end of the mold cavity is provided with an opening 28 which may receive in sealed relation the nozzle of an extruder.

In accordance with the present invention, in lieu of the nozzle of the extruder being directly received within the opening 28, a nozzle-like end 30 of a rotary valve member 32 is received in the opening 28 in sealed relation. The valve member 32 is mounted in sealed relation within a valve block 34 which has formed therein a first passage 36 which receives the conventional nozzle 40 of a plasticizer or injection head. The passage 36 opens radially toward the rotary valve member 32. The rotary valve member 32 has a through passage 42 which at one end terminates in a generally radial

passage 44 which can be aligned with the passage 36. There is also associated with the valve block 34 a second material dispenser 16 which in its simplest form may include a dispensing piston 48 and which has a flow passage 50 exiting therefrom toward the valve block 34. The valve block 34 has a radial passage 52 which is axially aligned with and in communication with the passage 50. The passage 52 terminates at the valve member 32. The valve member 32 has a further passage 54 extending generally radially from the passage 42 and so circumferentially spaced from the passage 44 such that when the passage 44 is aligned with the passage 36 the passage 54 is spaced from the passage 52 in a circumferential direction. By rotating the valve member 32, the passage 44 may be moved out of communication with the passage 36 and the passage 54 moved into communication with the passage 52. Thus material may be selectively supplied from either the plasticizer or from the supply device 46.

In accordance with this invention, the material delivered by the plasticizer will be a suitable thermoplastic resin in the form of a hot melt. This resin may be such materials as PET, PP, PE, PVC and PC. The barrier material which is supplied by the supply device 46 may be of any conventional known barrier material including, for example, EVAL, EVOH, PVOH and the like, or such barrier materials as may be developed in the future.

With respect to the foregoing, it is to be noted that EVAL has barrier properties on the order of one hundred times that of PET; EVOH has barrier properties on the order of one hundred to two hundred times that of PET; and PVOH has barrier properties on the order of two thousand times that of PET. Accordingly, only a very thin layer of these barrier materials is required, and from a commercial standpoint it is highly desirable to maintain such very thin layers because of the much higher cost of the barrier materials than the acceptable thermoplastic resins including PET.

It is also to be understood that the external thermoplastic resin layers must be of sufficient thickness to protect the barrier layer. On the other hand, in the case of a bottle for beverages or other products containing CO₂, the innermost layer of the thermoplastic material, i.e. that which defines the interior of the container, must be relatively thin so as not to absorb CO₂.

With the foregoing requirements in mind, the manner in which a laminated preform is formed in accordance with this invention will be described in detail.

Referring first to Figure 2, it will be seen that a preselected limited amount of a first thermoplastic resin 56 will be injected into the bottom of the mold cavity 22 and as it flows through the mold cavity,

due to the relatively cool temperature of the mold unit 20 including the core 26, there will be solidification of the thermoplastic resin 56 both externally and internally of the mold cavity 22 to define inner and outer layers 58, 60 of the first thermoplastic resin.

Reference is particularly made to Figure 5 at this time wherein it will be seen that the thermoplastic resin 56 has a laminar flow with the velocity of the advancing thermoplastic resin being the greatest in the center and diminishing toward zero adjacent the mold components. The velocity of the advancing thermoplastic resin 56 is generally indicated by an arrow schematic arrangement 62. It is to be understood that as the thermoplastic resin 56 solidifies upon contacting the mold components, the flow of the thermoplastic resin will discontinue adjacent the walls of the mold cavity 22 and there will be a tunnel flow effect between the layers 58, 60. Further, due to the relatively cool air within the mold cavity 22, there will be a slight cooling of the advancing front of the thermoplastic resin 56, which front is identified by the numeral 64.

It is to be understood that the thickness of the layers 56, 60 will be varied depending upon factors such as:

1. Material properties (viscoelastic and thermal)
2. Cavity dimensions
3. Injection velocity (pressure).

It is to be understood that a precise amount of the first thermoplastic resin 56 will be injected into the mold cavity 22 over a selected period of time, with this being schematically shown in Figure 6, and at a low pressure as indicated in Figure 7. The quantity of the thermoplastic resin which is injected into the mold cavity may be controlled in many conventional manners. Basically, injection of the thermoplastic resin is effected by axially advancing the feed screw of a plasticizer, and a suitable stop may be provided to limit the advance of the feed screw. There also will be the timed rotation of the valve member 32 to move the passage 44 out of alignment with the passage 36 and thus the quantity of thermoplastic resin 56 injected into the mold cavity 22 may be controlled by the timing of the actuation of the valve member 32.

As is schematically shown in Figure 6, the barrier material which is next injected into the mold cavity and is identified by the numeral 66, is fed toward the mold cavity in slightly overlapping relation with respect to the thermoplastic resin 56. It is to be understood that mechanism for feeding the barrier material 66, as schematically shown in Figure 1, may be of a single shot type so as to inject the exact amount of barrier material required.

With respect to Figure 7, it will be seen that the barrier material 66 will be injected into the mold

cavity 22 at a pressure only slightly higher than the pressure of the thermoplastic resin 56 with there being a very slight pressure drop as at 67 between the discontinuation of injecting the thermoplastic resin 56 and the initiation of the injection of the barrier material 66. The overlap in injection is to keep the pressure drop to a minimum.

Referring now to Figure 3, it will be seen that the barrier material 66 will have a tunnel flow through the cavity defined between the layers 58, 60 and at the same time will advance the previously injected thermoplastic material 56. Normally the barrier material will have a lower melting temperature than the thermoplastic resin 56, and therefore the cooling effect of the thermoplastic resin layers 58, 60 on the barrier material 66 will not be as great as the mold surfaces on the thermoplastic material 56. Thus, while there will be a solidification of the barrier material 66 as it contacts the solidified layers 58, 60 and there will be formed inner and outer solidified layers 68, 70 of the barrier material, these layers will be materially thinner than the layers 58, 60. For example, the layers 58, 60 will have a thickness varying from .010 to .040 inch, while the barrier material layers 68, 70 will have a thickness as low as .003 inch.

Referring now to Figure 4, in the illustrated embodiment of the mechanism for feeding the thermoplastic resin, an additional supply of the same thermoplastic resin identified by the numeral 56 is injected into the mold cavity. This additional supply of thermoplastic resin is generally identified by the numeral 72. The thermoplastic resin 72 as it advances within the confines of the layers 68, 70 of the barrier material will re-melt the barrier material and advance it together with the barrier material melt 66 through the tunnel defined by the layers 68, 70, thereby reducing the thickness of the layers 68, 70. As will be apparent from Figure 4, the advancing thermoplastic resin 72 will advance the barrier material 66 which, in turn, will continue to advance the thermoplastic resin 56.

Further with respect to Figure 4, it will be seen that the advancing large quantity of the thermoplastic resin 72 as it engages the layers 58, 68 at the end of the core 26, will melt portions of the solidified layers 58, 68 and advance the same with the result that there may be no portion of either the layer 58 or the layer 68 at the extreme end of the core 26.

Referring next to Figure 6, it will be seen that the thermoplastic resin 72 is advanced in slightly overlapping relation with the barrier material 66. It is to be understood that once the injection of the barrier material 66 has been completed the valve member 32 will be rotated to a position to receive the thermoplastic resin 72. In the illustrated embodiment, the valve member 32 will be returned to

its starting position since the thermoplastic resin 72 is delivered from the same supply as the thermoplastic resin 56.

With respect to the diagram of Figure 7, it will be seen that the thermoplastic resin 72 will be injected first at a gradually increasing pressure above the pressure of the injection of the barrier material 66 with a slight initial pressure drop, as indicated at 74. Then, when the cavity 22 has been filled, there will be a pressure boost, as at 76, followed by a holding period 78 wherein the pressure of the hot melt material injected into the mold cavity will gradually decrease as the thermoplastic material 72 gradually solidifies.

Depending upon usage of the preform which is formed in the manner described above, the amount of the thermoplastic resin 56 and the barrier material 66 injected into the mold cavity 22 will vary. Further, the shape of the preform at the front end thereof will vary.

In Figures 8, 9 and 10, there are illustrated preforms which are particularly adapted to be used in their entireties in the blow molding of bottles and like containers wherein a small diameter closure is applied by means of screw threads.

With respect to Figure 8, the illustrated preform portion is part of a preform identified by the numeral 80 and includes a laminated body 82 which terminates in a neck finish generally identified by the numeral 84. The neck finish 84 includes injection molded threads 86 and a shoulder member 88 by means of which the preform 80 is supported during reheating and blow molding.

In the preform 80, the quantity of thermoplastic resin 56 injected into the mold cavity is sufficient to have the layers 58, 60 extend to the extreme end of the preform 80 and to form at the extreme end an end wall 59. Further, the quantity of barrier material injected into the mold cavity is sufficient to have the layers 68, 70 extend to a point adjacent the extreme end of the preform and to form an end wall 69 adjacent the end wall 59. The thermoplastic resin 72 will also extend to a point adjacent the extreme end of the preform 80 as permitted by the end wall 69.

In Figure 9 there is illustrated a preform 90 which will be of the same configuration as the preform 80. Further, while the quantity of the thermoplastic resin 56 directed into the mold cavity will be sufficient for the layers 58, 60 to go to the extreme end of the preform including a neck finish portion 92 thereof and to form the end wall, the quantity of the barrier material 66 injected into the mold cavity will be such that the layers 68, 70 will terminate interiorly of the preform short of the neck finish 92 into that area of the resultant bottle which becomes the shoulder of the bottle, as will be described in detail hereinafter.

With respect to Figure 10, the preform 94 thereof is also of an identical configuration to the preform 80. However, the quantity of the thermoplastic resin 56 introduced into the mold cavity will be only sufficient for the layers 58, 60 to extend to a point adjacent to the neck finish 96 of the preform 94. Thus, the neck finish part of the preform 94 will be formed solely by the thermoplastic resin 72. Further, the quantity of the barrier material 66 injected into the mold cavity will be such that the layers 68, 70 terminate internally of the preform short of the termination of the layers 58, 60.

In Figures 11 and 12 there are illustrated preforms for forming containers and like hollow articles other than bottles or containers with small diameter neck finishes. An extreme end portion only in radial section of such preform is illustrated in each of Figures 11 and 12.

With particular reference to Figure 11, it will be seen that there is illustrated a preform 98 having an open end portion 100 which may include a supporting flange or collar 102. Inasmuch as the end portion 100, as will be described in detail hereinafter, is utilized solely as a support in the blow molding of the preform 98 into a tubular shape, it is not necessary that the barrier material 66 extend into the end portion 100. Therefore, only sufficient barrier material is injected into the mold cavity of the preform 98 so as to permit the layers 68, 70 to terminate adjacent the end portion 100. In a like manner, the quantity of thermoplastic resin 56 injected into the mold cavity will be only sufficient to have the layers 58, 60 extend generally into the area of the end portion 100. Thus, the end portion 100 will be formed entirely by the thermoplastic resin 72.

In Figure 12 there is illustrated yet another preform 104 which is identical to the preform 98 including an end portion 106 and a flange or collar 108, except that the end portion 106 is formed entirely by the thermoplastic resin 56 and the layers formed by the resins 66 and 72 terminate in relatively great spaced relation to the end portion 106. The preform 104 is advantageous in forming a container or like tubular body wherein an intermediate article of manufacture is involved.

Referring now to Figure 13, it will be seen that there is illustrated an intermediate article of manufacture generally identified by the numeral 110 and blow molded from a preform such as the preform 98 or the preform 104. The intermediate article of manufacture includes a base portion 112 in the form of a container. The base portion 112 includes a tubular body 114 having an integral bottom 116 and terminating in a closure receiving portion 118. The illustrated closure receiving portion 118 is in the form of a flange adapted to be engaged by a

conventional metal end unit and forming part of a conventional double seam securing the metal end unit (not shown) to the base portion 112 which, when separated from the remainder of the intermediate article of manufacture 110, becomes a container.

Although it has not been so illustrated, the intermediate article of manufacture 110 may have the closure receiving portion 118 in the form of a neck finish which may be threaded or otherwise modified to receive a closure unit. At this time it is to be understood that except for the fact that it is formed from a laminated preform the intermediate article of manufacture 110 has been formed prior to this invention.

It will be seen that the intermediate article of manufacture also includes an upper blow molded portion 120 which terminates in an end portion 122 which will correspond to the end portions 100, 106 of the preform 98, 104.

With respect to Figure 14, the intermediate article of manufacture illustrated therein was formed from a preform such as the preform 104 of Figure 12. It is to be understood that the upper portion 120 is to be separated from the base portion 112 by a cutting action, such as a fusion cutting action, with the removal of a portion 124. It will be seen that in this embodiment of the invention the layers 68, 70 terminate in the closure receiving portion 118 and that the layer formed by the thermoplastic material 72 terminates entirely within the base portion 112. Thus all of the intermediate article of manufacture 110 which is to be severed from the base portion 112 will be formed by the thermoplastic resin 56 and may be reconditioned and reused.

On the other hand, with respect to Figure 15, there may be occasions where it is desired that the barrier material layers 68, 70 extend beyond the closure receiving portion 118 into the upper portion 120. Thus, when the base portion 112 is removed from the remainder of the intermediate article of manufacture 110, the layers 68, 70 of the barrier material will extend through the cut edge of the base portion 112 into the upper portion 120. In a like manner, the layers 58, 60 of the first thermoplastic resin will also extend into the upper portion 120. Thus, when the base portion 112 is severed from the remainder of the intermediate article of manufacture 110 by removal of the material in the area 126, the intermediate article of manufacture 110 illustrated in Figure 15 may be formed, for example, from the preform of Figure 11. When the cutting action involves heat fusion of the cut layers to one another may be effected at the end of the base portion 120.

In Figure 16 there is illustrated a conventional bottle which may be formed from any one of the

preforms of Figures 8, 9 and 10. The bottle is generally identified by the numeral 128 and includes a tubular body 130 having an integral bottom 132. The body 130 at its upper end is connected by way of a shoulder 134 to a neck finish 136.

It is to be understood that the neck finish 136 will be identical to the neck finish of the respective preform from which the bottle 128 is blow molded. Further, it will be seen that the termination of the layers 68, 70 of the barrier material may be at the extreme end of the neck finish 136 when the preform of Figure 8 is utilized. On the other hand, when the preform of Figure 9 is utilized, the layers 68, 70 of the barrier material will terminate in the shoulder 134 adjacent the neck finish 136. Finally with respect to the use of the preform of Figure 10, both the layers 68, 70 of the barrier material and the layers 58, 60 of the first thermoplastic resin will terminate in the shoulder 134 adjacent the neck finish 136.

With particular reference to the bottle 128, it is to be understood that in the normal blow molding of such bottle the body portion 130 will be very thin, having been reduced in thickness on the order of one-tenth or less so that the material forming the body 130 will have a positive and desired biaxial orientation. On the other hand, the material of the bottle 128 in the shoulder 134 closely adjacent the neck finish 136 will have only a minor reduction in thickness while the material in the neck finish 136 will not be reduced in thickness at all. Thus the barrier material 66 may beneficially terminate in the shoulder 134 as described above.

It is also pointed out here that the extreme center of the bottom 132 is of a such greater thickness than the body 130, and therefore the absence of barrier material in the central part of the bottom 132 will not be a material omission.

Reference is finally made to Figure 17 which is a radial cross section of the body 130 and shows inner and outer layers 58, 60 of the first thermoplastic material 56, inner and outer layers 68, 70 of the barrier material 66, and a central core of the other thermoplastic material 72. Inasmuch as there is a reduction in thickness of the laminated preform on the order of ten times, the thickness of the layers 58, 60 in the bottle 128 will be on the order of .001 to .004 inch, while the thickness of the barrier material layers 68, 70 will be on the order of .0003 inch. The thickness of the layer 58 will be sufficient to protect the barrier layer 68 against the contents of the bottle 128 including available CO₂.

Further, it has been found that when the barrier material 66 does not have properties which permit the heat bonding thereof to the thermoplastic resin and the thickness of the layers 68, 70 have been relatively great as required by known practices,

when the blow molded article has been formed there has been a positive delamination of the layers of barrier material from the remainder of the blow molded article. However, when the barrier material layers in the preform are very thin, as described hereinabove, it has been found that the prior pronounced delamination does not occur. A conventional test for delamination is the squeezing of the body of a blow molded article, and if there is delamination there will be a squeaking noise emitted. When the barrier material layers are very thin at the start, the blow molded articles utilizing such a preform do not emit the squeaking noise and do not show evidence of a complete delamination.

There has recently been developed by others a five-layer tubular parison which is formed as an extruded tube. Such parison does have a barrier layer which is thin, but which is not directly bonded to the thermoplastic resins which form the primary layers of the parison. The method of forming such a multi-layer parison is not conducive to The diffusion bonding of a barrier layer to a conventional thermoplastic resin layer by way of pressure when the materials of the two layers are not normally heat bondable together in that the components of such a tubular parison are extruded at a low pressure on the order of 2000 to 5000 p.s.i. and as soon as the tube leaves the extrusion head, at which time all components are hot, the pressure is relieved and as the components cool they shrink and tend to separate.

On the other hand, as is schematically shown in Figure 7, when the various materials are introduced into the mold cavity 22 by a conventional injection molding process, the barrier layers 68, 70, in addition to being very thin and thus relatively incompressible, are clamped between the core 72 and the layers 58, 60 at a very high pressure on the order of 15,000 to 17,000 p.s.i. Therefore, while the barrier layers 68, 70 may not be heat bondable to the thermoplastic resin layers 58, 60 and the core 72, there is a considerable diffusion bonding effected between these layers at the high forming temperatures and pressures. Further, as is also shown in Figure 7, after the injection step has been completed there is a maintaining of a high pressure on the materials previously injected into the mold cavity and thus the pressure is maintained between the layers as the materials of the layers shrink, thereby preventing any tendency to separate due to relative shrinkage.

Since the thickness of the barrier layers 68, 70 may be as low as .003 inch, it will be apparent that it is of a relatively incompressible thinness. Further, as disclosed hereinbefore, the preform, at least in the body portion of the resultant blow molded hollow member, will be stretched on the order of ten times, thereby reducing the thickness of the barrier

layers 68, 70 to be as low as .0003 inch, which thinness results in the resultant barrier layers as being extremely thin and thus incompressible for all practical purposes. The net result is that in the resultant blow molded hollow member the barrier layers 68, 70 maintain a pressure bond with the thermoplastic resin layers 58, 60 and the core 72.

Although specific materials have been described as being beneficially acceptable, it is to be understood that the possibilities of utilizing barrier materials which are not commercially acceptable at this time definitely exist because of the ability to maintain the thickness of the barrier material layers in the blow molded article one which provides for the desired barrier characteristics without utilization of an excess amount of the otherwise prohibitively expensive material.

Although only several preferred embodiments of the invention have been specifically illustrated and described herein, it is to be understood that material layers within the preforms may be varied in accordance with the desired uses of the preforms and the resultant blow molded articles.

Claims

1. A laminated preform for forming blow molded articles said preform being of the type formed solely by injection molding in a single conventional mold unit wherein said preform (80) has a tubular wall having inner and outer surfaces and said tubular wall in radial cross-section comprises inner and outer first layers (58, 60) of an identical coinjected thermoplastics resin, characterised in that said tubular wall in radial cross-section further comprises very thin inner and outer layers (68, 70) of an identical coinjected gas barrier material next to and between said inner and outer first layers (58, 60), and a second layer of thermoplastics resin (72) between said barrier material layers.
2. A laminated preform according to claim 1 wherein the combined thickness of said inner and outer layers (68, 70) of barrier material is of the order of 0.15mm (0.006 inch).
3. A laminated preform according to claim 1 or 2 wherein said preform (80) has a rounded base including an endmost part, and said endmost part is formed solely by the material of said first layers of thermoplastics resin.
4. A laminated preform according to claim 1, 2 or 3 wherein said preform (98) has an open end and said layers (68, 70) of barrier material (66) terminate in said tubular wall remote from said open end.
5. A laminated preform according to any of claims 1 to 4 wherein said layers (68, 70) of barrier material terminate between said first and second layers (58, 60) of said thermoplastics resin (56).
6. A laminated preform according to any of claims 1 to 5 wherein said preform (80) is for forming a blow molded container having a neck finish (92), said preform includes said neck finish, and said barrier material layers (68, 70) terminate adjacent but short of said neck finish (92).
7. A laminated preform according to any of the preceding claims wherein said second layer of thermoplastics resin (72) is of a material different from said first layers (58, 60) of thermoplastics resin.
8. A laminated preform according to any of claims 1 to 6 wherein said second layer of thermoplastics resin (72) is of the same material as said first layers (58, 60) of thermoplastics resin.
9. A blow molded container formed from a preform as claimed in any of the preceding claims, said container having a bottom (132), a body (130), and said body terminating in a neck finish (136), wherein at least said body (130) is of a laminated construction.
10. A blow molded container according to claim 9 wherein said layers (68, 70) of barrier material have a combined thickness on the order of 0.015mm (0.0006 inch).
11. A blow molded container according to claim 9 or 10 wherein said layers (68, 70) of barrier material extend through said neck finish (136).
12. A blow molded container according to claim 9 or 10 wherein said layers (68, 70) of barrier material extend into and terminate in said neck finish (136).
13. A blow molded container according to claim 9 or 10 wherein said layers (68, 70) of barrier material extend to and terminate in an area adjacent said neck finish (136).
14. A method of forming a blow molded hollow member (110) comprising the steps of forming by injection molding in sequence in a single conventional injection mold for a preform:
 - (a) a first thermoplastics resin to form in cross section inner and outer first layers (58, 60) of a tubular body of a preform formed of said first thermoplastics resin;
 - (b) a gas barrier material to form very thin inner and outer layers (68, 70) of the barrier material next to and between said inner and outer first layers (58, 60); and
 - (c) a second thermoplastics resin forming a core layer (72) between said barrier material layers (68, 70) with said barrier material layers being free of heat bonds with said inner and outer first layers (58, 60) and said core layer (72), and with said barrier layers; with each of said barrier material layers (68, 70) being tightly compressed between adjacent ones of said core layer (72) and said inner and outer first

layers (58, 60) to form compression diffusion bonds between each of said barrier layer (68, 70) and said core layer (72) and the respective one of said inner and outer first layers (58, 60);

and blow molding the preform into a hollow member while biaxially stretching the layers and reducing the thickness of the layers with the thickness of each said barrier layer (68, 70) being reduced to a substantially incompressible thickness.

5

15. A method according to claim 14 wherein the thickness of each said barrier layer (68, 70) in said preform (80) is of the order of 0.076mm (.003 inch).

10

16. A method according to claim 14 or 15 wherein the thickness of each said barrier layer (68, 70) in said hollow member (110) is on the order of 0.076mm (.0003 inch).

15

17. A method according to claim 14, 15 or 16 wherein in the forming of said preform (80) each said barrier layer (68, 70) is compressed at a pressure of 2.18 Pa (15,000 p.s.i.) to 2.47 Pa (17,000 p.s.i.) to effect said diffusion bond.

20

18. A method according to claim 17 wherein a high pressure is maintained as said preform cools and sets to prevent separation between the layers (58, 60, 68, 70, 72) due to shrinkage.

25

19. A laminated preform according to any of claims 1 to 8 wherein said layers (68, 70) of barrier material are tightly compressed between adjacent ones (58, 72, 60) of said layers to form diffusion bonds with adjacent layers.

30

20. A blow molded container according to any of claims 9 to 13 wherein there are diffusion bonds between said barrier material layers (68, 70) and said first layers (58, 60) and further layer (72) of thermoplastics resin.

35

21. A blow molded container according to claim 20 wherein all of said layers are biaxially oriented.

40

45

50

55

FIG.1

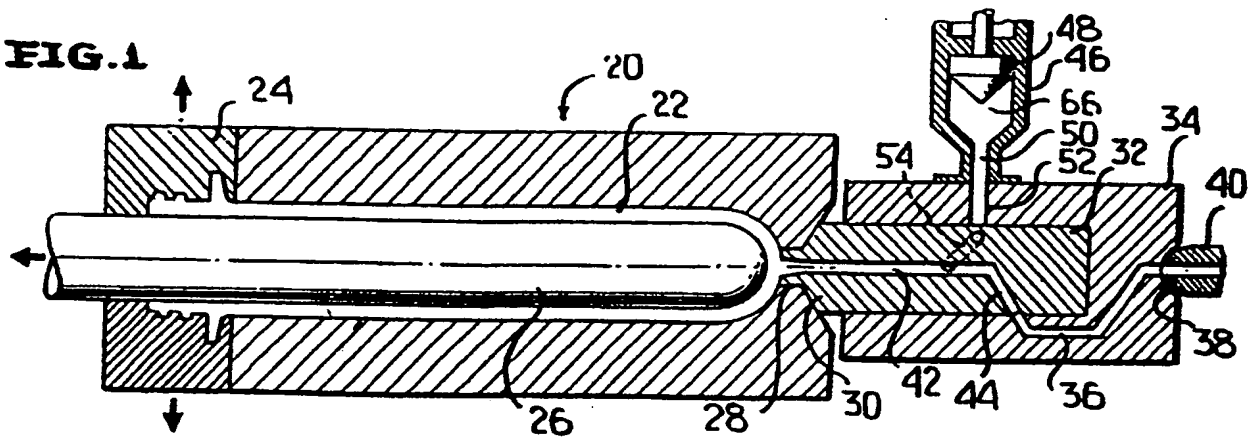


FIG.2

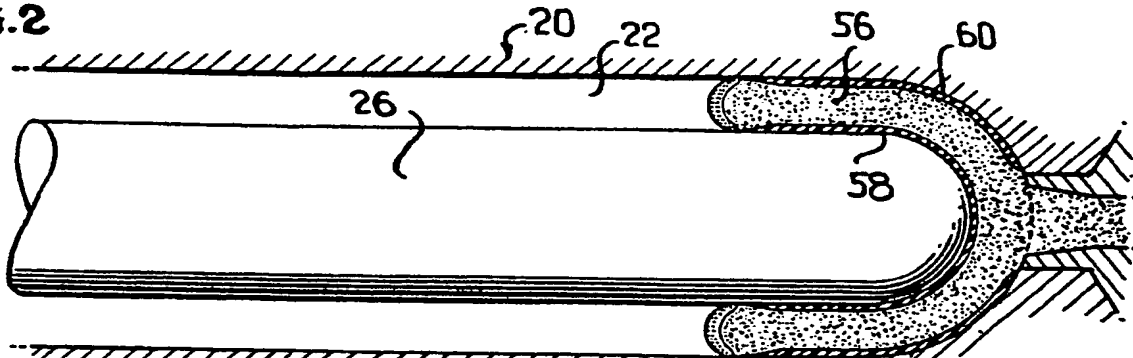


FIG.3

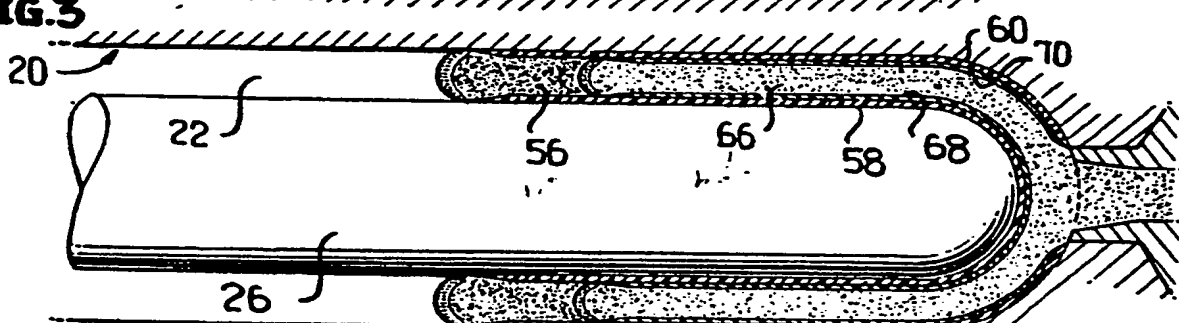


FIG.4

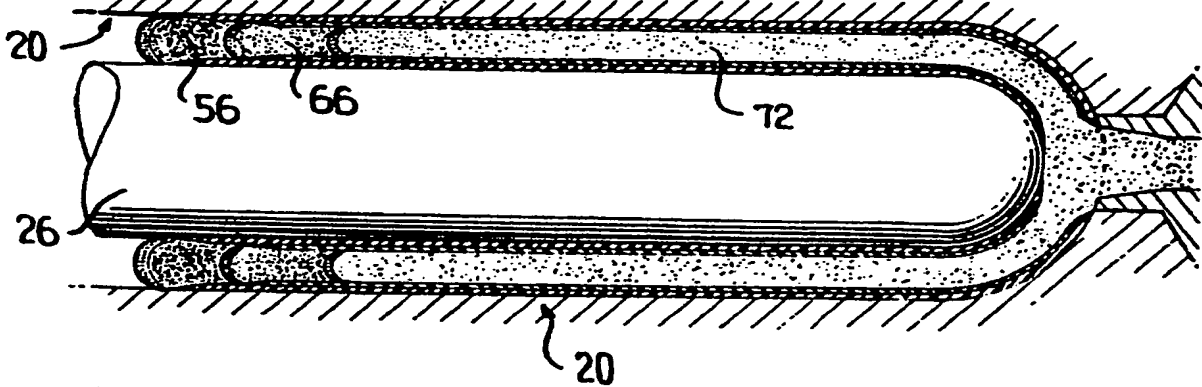


FIG. 5

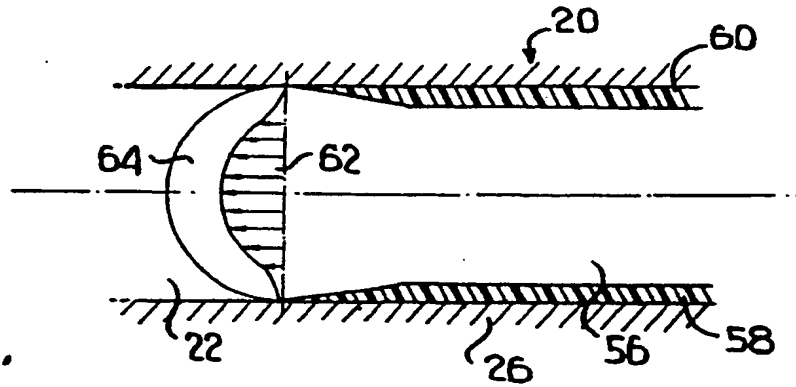


FIG. 6

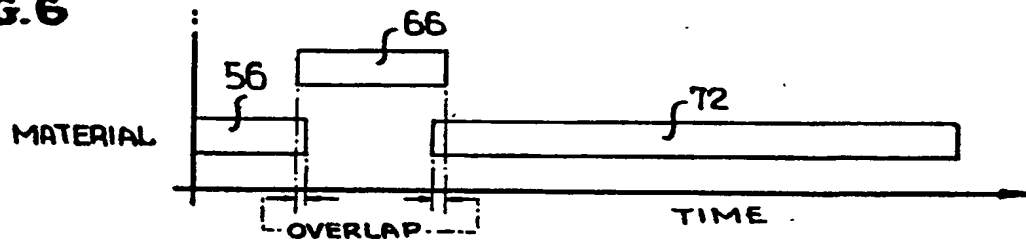


FIG. 8

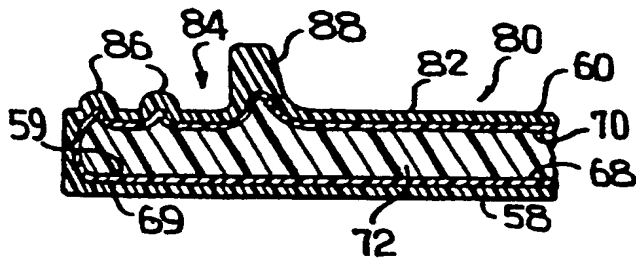


FIG. 11

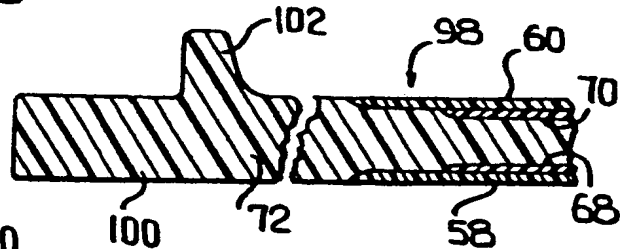


FIG. 9

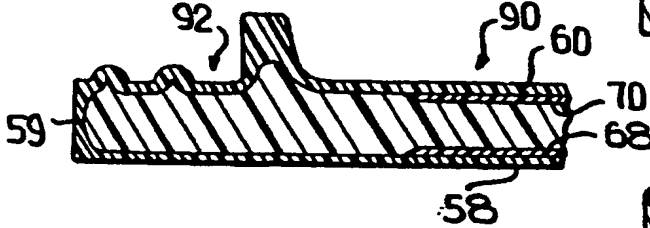


FIG. 12

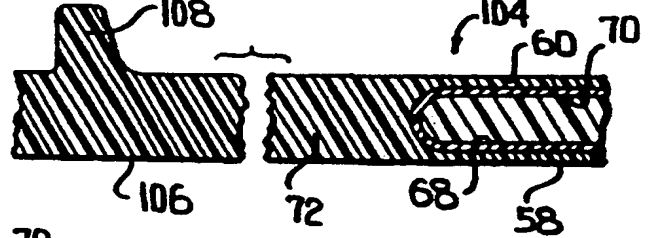


FIG. 10

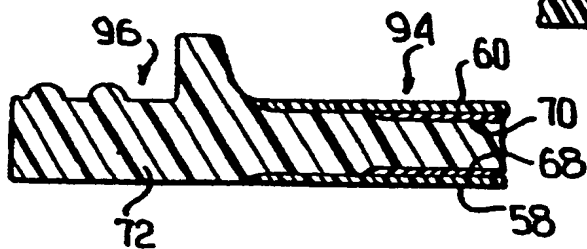


FIG.13

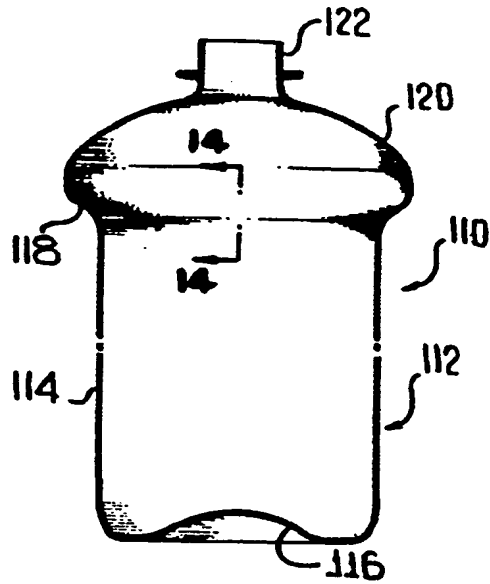


FIG.16

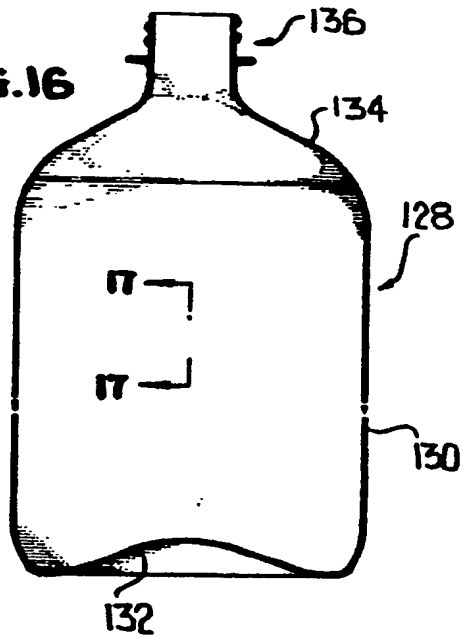


FIG.14

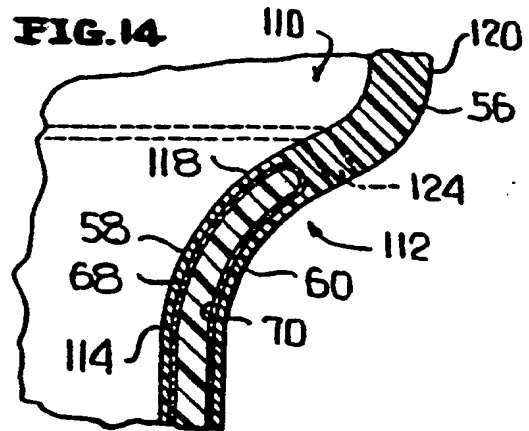


FIG.15

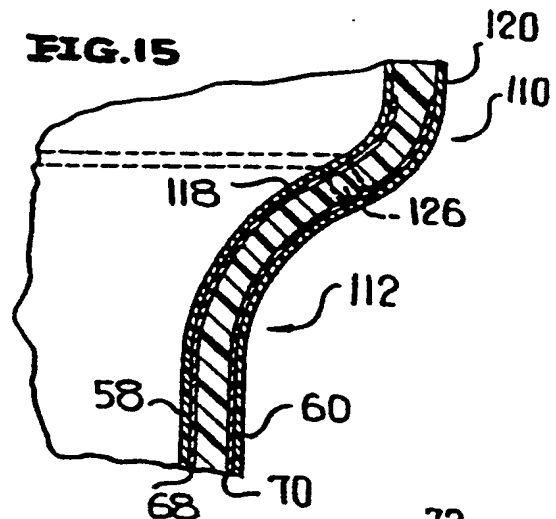


FIG.17


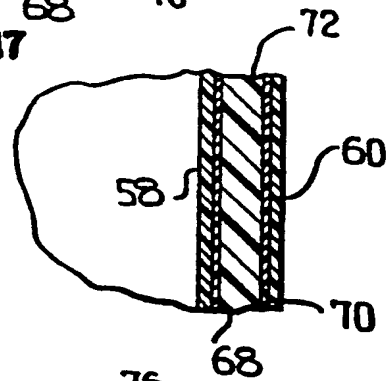


FIG.7



(19)

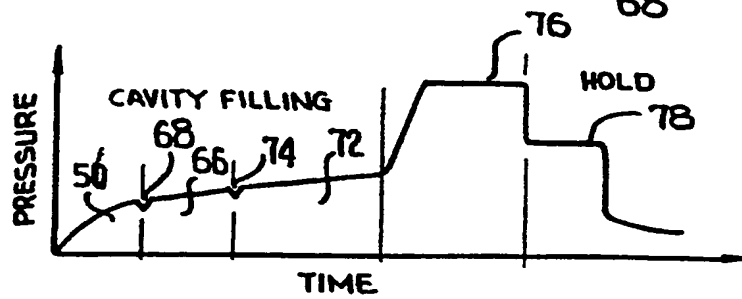

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 392 571 A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 90111052.8

(51) Int. Cl.⁵: **B29C 45/16, B29C 49/22**

(22) Date of filing: 11.02.85

(30) Priority: 17.02.84 US 581409

(43) Date of publication of application:
17.10.90 Bulletin 90/42

(60) Publication number of the earlier application in
accordance with Art.76 EPC: 0 153 120

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL SE

(88) Date of deferred publication of the search report:
16.01.91 Bulletin 91/03

(71) Applicant: **CONTINENTAL PET
TECHNOLOGIES, INC.**
800 Connecticut Avenue
Norwalk Connecticut 06856(US)

(72) Inventor: **Krishankumar, Suppayan M.**
23 Old Coach Road
Nashua, New Hampshire 03050(US)
Inventor: **Nahill, Thomas E.**
43 Budron Avenue
Salem, New Hampshire 03079(US)

(74) Representative: **Hallam, Arnold Vincent**
E.N. LEWIS & TAYLOR 144 New Walk
Leicester LE1 7JA(GB)

(54) **Laminated preform with internal barrier layer.**

(57) This relates to laminated preforms, the method of forming such preforms and products which may be beneficially formed utilizing such preforms. Most particularly, this relates to a preform (80) which has formed as part of the injection molding thereof two layers of barrier material (68,70) which are disposed within two layers of thermoplastic resin (58,60) and having received therebetween a solid core of thermoplastic resin. The specific method of forming the preform permits the barrier material layers to be of a greatly reduced thickness as compared to such layer thicknesses permissible in the past, with the result that the barrier material layers in the blow molded articles are of a thickness recognized to be acceptable for the barrier function. The barrier material layers may be selectively terminated along the length of the preform so as to permit portions of the resultant blow molded article to be removed and reused.

EP 0 392 571 A3



European
Patent Office

EUROPEAN SEARCH REPORT

Application Number

EP 90 11 1052

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X,Y	PATENT ABSTRACTS OF JAPAN vol. 26, no. 187 (M-98)(859) 26 November 1981, & JP-A-56 106838 (TOPPAN INSATSU K.K.) 25 August 1981, " the whole document "	1-5,7, 14-18	B 29 C 45/16 B 29 C 49/22
Y	FR-A-2 173 088 (IMPERIAL CHEMICAL INDUSTRIES) " claims 1, 3; figures 3, 4 "	14-18	
Y,A	DE-A-2 755 216 (DEMAG KUNSTSTOFFTECHNIK ZWEIGNIEDERLASSUNG DER DEMAG AG) " page 10 "	14-18,19, 20	
A	DE-A-2 733 913 (ASAHI-DOW LTD.) " pages 33 - 39; claims 5, 6; figures 3, 4, 6, 12 "	1-21	
D,A	US-A-3 976 226 (B. MONNET) " abstract "	1	
A	WO-A-8 100 230 (AMERICAN CAN COMP.)		
A	US-A-4 052 497 (MONNET)		
A	US-A-3 457 337 (H.TURNER)		
A	US-A-4 393 106 (MARUHASHI)		
The present search report has been drawn up for all claims			
Place of search		Date of completion of search	Examiner
The Hague		13 November 90	KORTH C-F.F.A.
CATEGORY OF CITED DOCUMENTS			
X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention		E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons ----- &: member of the same patent family, corresponding document	